

# STONE CRUSHER

## RSM



from 180 to 360 HP



Ø50 cm max (stones)



D40 cm

### STONE CRUSHER FOR TRACTORS WITH FIXED TEETH ROTOR.

The RSM is designed for the toughest applications. With multiple working widths available, it can crush stones up to 20" in diameter.

STANDARD EQUIPMENT	OPTIONS
Cam clutch on side PTO	PTO shaft
PTO shaft with cam clutch	Bolted grid on rear hood
Gearbox with freewheel	Hydraulic top link
Transmission with side gearbox	Dozing blade
Hydraulic rear hood	Hydraulic support roller
Adjustable hardox counter-blade	Multiple tooth options
Interchangeable steel counter-blades in Hardox®	Stronger transmission for tractors up to 360HP
Interchangeable inner antiwear plates in Hardox®	Automatic greasing kit
Anti dust machine body	
Inside lateral protection	
Protection chains	



### FEATURES




**Enclosed machine body**  
protects internal components



**Hydraulically controlled hood**  
adjusts final product size

**Adjustable Hardox® counter-blade**  
effectively control the final product size

**Skids with interchangeable Hardox® shoes and ploughshares**  
help the machine better penetrate the ground

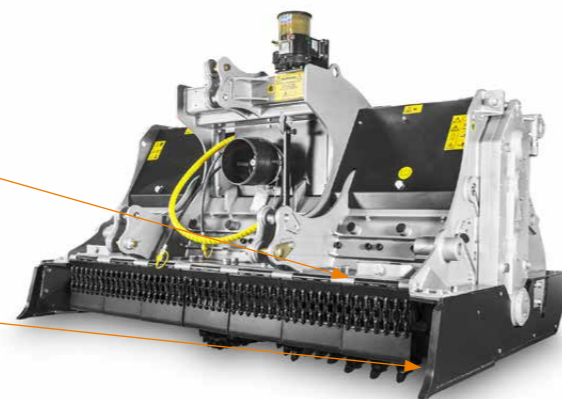

### MAIN OPTIONS



**1 Automatic greasing kit**



**2 Hydraulic top link**  
pour atteindre et maintenir la profondeur

MODEL	Tractor (HP)		PTO (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	Max shredding diameter (mm)	Max working depth (mm)	No. teeth type	
	min	max							R•R/HD•STC/3/FP + STC/FP	G/3•STC/3/FP + STC/FP
<b>RSM 175</b>	180	360	1000	1840	2250	4700	500	400	106+20+4+4	80+4+4
<b>RSM 200</b>	200	360	1000	2080	2490	5060	500	400	126+20+4+4	92+4+4
<b>RSM 225</b>	220	360	1000	2320	2730	5490	500	400	144+20+4+4	104+4+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.