

TILLERS FOR SPECIAL BUILT CARRIERS

300S



from 250 to 400 HP



Ø50 cm max



D40 cm

FORESTRY TILLER FOR HYDRAULIC CARRIERS.

The 300S allows grinding of stumps and roots up to 20" diameter, a depth of 40 cm and a working width of more than 2,5 m.


This ensures higher productivity and allows large areas to be reclaimed while still maintaining a well masticated final product.

Transmission designed for low rotor speed with high torque output.



STANDARD EQUIPMENT AND OPTIONS

Considering the various available options and high level of customization, the final configuration will be specified upon request

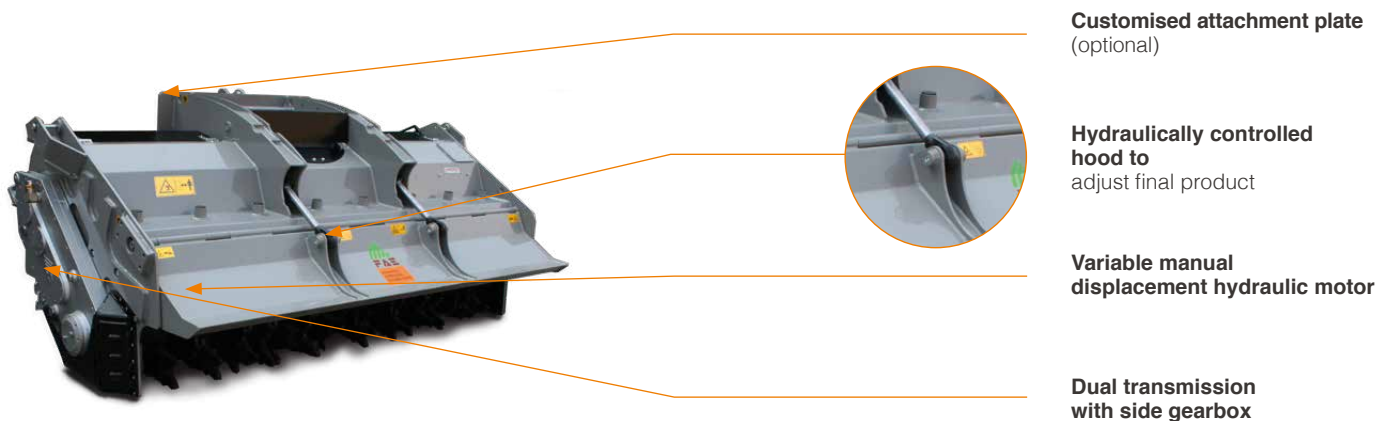

MODEL	Engine (HP)		Flow rate (L/min)		Pressure (bar)		Working width (mm)	Total width (mm)	Weight (kg)	Max working depth (mm)	Max shredding diameter (mm)	No. teeth A/3 + MH
	min	max	min	max	min	max						
300/S - 225	250	400	550		380		2320	2650	3520	400	500	88+4
300/S - 250	280	400	550		380		2560	2890	3770	400	500	102+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.