

TILLERS FOR SPECIAL BUILT CARRIERS

500S



from 450 to 650 HP



Ø 60 cm max



D50 cm


TILLER FOR HYDRAULIC OR MECHANICAL APPLICATIONS.

The transmission on the 500S was developed for use with 450 HP to 650 HP dedicated carriers. The 500S is designed for mulching stumps up to a diameter of 60 cm and roots up to 50 cm depth. Our research, technology and heavy duty construction enable this machine to be reliable and have a long working life.



STANDARD EQUIPMENT AND OPTIONS

Considering the various available options and high level of customization, the final configuration will be specified upon request

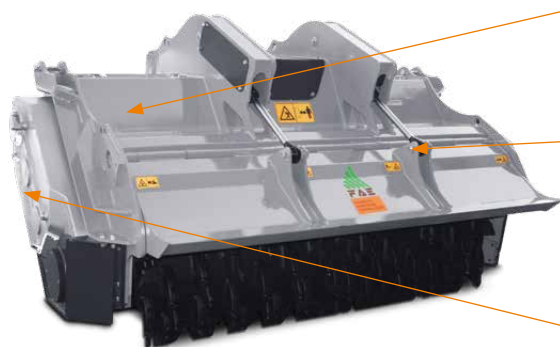

Variable manual displacement hydraulic motor



Hydraulically controlled hood to adjust final product



Dual transmission with side gearbox reduces the speed of the rotor thereby reducing tool wear

MODEL	Engine (HP)		Flow rate (L/min)		Pressure (bar)		Working width (mm)	Total width (mm)	Weight (kg)	Max working depth (mm)	Max shredding diameter (mm)	No. teeth B/3+STC/3/FP +STC/FP
	min	max	min	max	min	max						
500/S - 225	450	650	550	780	350		2320	2950	5700	500	600	104+4+4
500/S - 250	450	650	550	780	350		2560	3190	5950	500	600	128+4+4
500/S - 275	450	650	550	780	350		2800	3430	6200	500	600	152+4+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.